

# P3Pro TURBO



WIRELESS  
PEN MACHINE



Thank you for reading!  
[www.eztattoosupply.com](http://www.eztattoosupply.com)

  @EZTATOO OFFICAL

Created and Manufactured in China by EZ

# OVERVIEW



# P3 Pro TURBO



This device does not support fast charging. Please use the provided cable for charging.

## SPECIFICATIONS




Battery Capacity



Recharging Time




Powerpack Working Time



Unlocked In Future


# BASIC OPERATION

## Power ON/ OFF

Press and Hold the power button  for two seconds to turn P3 Pro Turbo On or Off.


**Note:** P3 Pro Turbo with a function (Auto Power Off) to turn off the power automatically if the machine has not been used for 5 mins.

## Power START/ STOP


Click power button  to power the P3 Pro Turbo Start or Stop.

## Adjust Voltage

Press  or  to adjust in 0.1V increments.

Press and Hold  or  to quickly adjust the voltage in 0.1V increments.




## Start/ Stop Built-in Timer

Press  button to active your machine ON, the timing mode start.

**Note:** timer mode record in minutes, the maximum recording time is 999 minutes.

The time is counting only when machine is running. The timer will reset the count when the P3 Pro Turbo is being restarted.

## Push Mode

Press  and  button at the same time, Screen  solid, the machine active the push mode.

**Note:** In push mode the initial voltage output is 10V lasts for 1 second and then returns to normal voltage after.

# SPECIFICATIONS

|   |                             |
|---|-----------------------------|
| <b>Motor</b>                            | EZ Customized Swiss Motor   |
| <b>Material</b>                         | Aircraft Aluminum           |
| <b>Stroke Length</b>                    | 3.0mm to 5.0mm              |
| <b>Operating Voltage</b>                | 5- 12V DC                   |
| <b>Five Options Adjustable Stroke</b>   | 3.0, 3.5, 4.0, 4.5, 5.0mm   |
| <b>Rpm</b>                              | 10000rpm $\pm$ 10%          |
| <b>Switch Frequency</b>                 | 60 - 170Hz                  |
| <b>Needle Protrusion</b>                | 0 - 4.5 mm                  |
| <b>Dimensions(<math>\Phi</math>X L)</b> | 34 mm x 128 mm              |
| <b>Weight</b>                           | 6.7oz(189g) with power pack |


## INCLUDED

- P3 Pro Turbo
- User Guide
- Battery
- Type-C Charging Cable
- Hex Wrench

# P3 Pro TURBO



# COMPATIBLE WIRELESS FOOTSWITCH

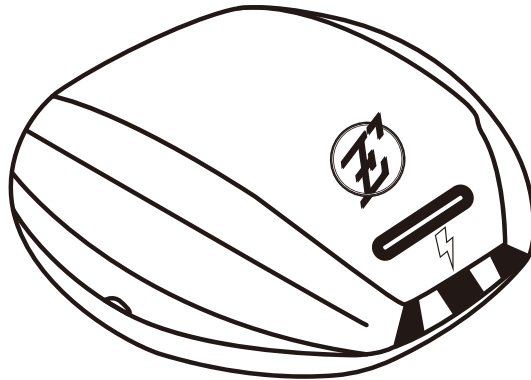

## INSTRUCTION

Use The Wireless Footswitch To Start/Pause The Device.

## POWER ON/OFF:

Slide The Switch To Turn On/Off.




## PAIRING:

Turn On The Footswitch. The Flashing Red And Blue Lights Indicate That The Footswitch Is Ready For Pairing. Ensure That The Device's Bluetooth Mode Is Enabled. It Will Automatically Connect To Your Footswitch. Once Connected, The Flashing Blue Lights On The Footswitch Will Indicate A Successful Connection. After The Initial Pairing, P3 Pro Turbo Will Automatically Connect To The Footswitch.




## WORKING MODE:

There Are Two Distinct Working Modes Of The Footswitch:

### Maintain Mode:

To Activate Maintain Mode, Tap and Hold Both  and . When The  On The OLED Display Is Flashing, It Indicates That Maintain Mode Is Active. In This Mode, Tap And Hold The Footswitch To Keep The Device Running. Release The Footswitch To Pause The Device.

### Momentary Mode:

To Activate Maintain Mode, Tap and Hold Both  and . The  On The OLED Display Will Remain Solid To Indicate The Activation Of Momentary Mode. In This Mode, A Single Tap Will Start Or Pause The Device.

# OVERVIEW



Type-C Port

Power Pack

Stroke Adjustment Knob

Motor


128 mm

**P3 Pro**  
**TURBO**



Φ34 mm

# STROKE ADJUSTMENT

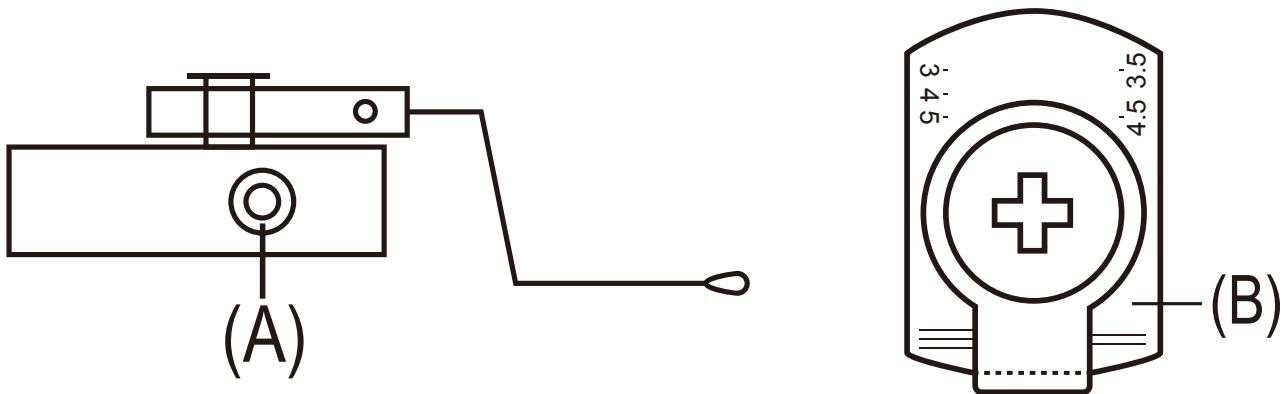

- Locate the adjustment components on your EZ Tattoo Machine. Find marked sections on the picture labeled "A" and another labeled "B."
- Using the provided hex wrench, carefully unscrew the fastening at mark A. Ensure that you have a firm grip on the machine to prevent any accidental movement.
- Once mark A is loosened, you can now adjust the stroke length according to the line marked on point B. This adjustment allows you to customize the machine's performance based on your preferences.
- After making the desired stroke adjustment, securely tighten the fastening at mark A using the hex wrench. Ensure it is tightened adequately to prevent any instability during tattooing.

# WARRANTY INFORMATION

|                      |                       |
|----------------------|-----------------------|
| <b>MOTOR:</b>        | One Year Warranty     |
| <b>BATTERY PACK:</b> | Six Months Warranty   |
| <b>SPARE PARTS:</b>  | Three Months Warranty |

## COVERAGE

This Warranty Covers The P3 Pro Turbo Wireless Pen Machine Purchased From Our Online Store Or Authorized Distributors Worldwide.  
The Warranty Period Starts From The Date Of Purchase.

## WHAT IS NOT COVERED

Damage To The Product Caused By Human Factors.

Product Damage Resulting From External Electrical Failures Or Accidents.

## BATTERY PROTECTION

- 1) The Battery Is Equipped With Circuitry To Protect It From Extreme Temperatures, Over-discharge, And Over-charge.
- 2) It Will Automatically Turn Off If Overloaded Or Exposed To High Temperatures During Use, Such As In Situations With Excessive Strain.
- 3) The Shutdown Occurs Temporarily When The Operating Temperature Exceeds 158°f (70°c) And Resumes When It Returns To 152°f (67°c).

# WARRANTY CARD

Product Name: \_\_\_\_\_

Date of Purchase: \_\_\_\_\_

Where Purchased: \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

Email: \_\_\_\_\_

Customer Acknowledgement:

My Signature Below Acknowledges That I Have Read, Fully Understand, And Accept This Limited Warranty Agreement.

SIGNATURE: \_\_\_\_\_

DATE: \_\_\_\_\_

Send This Copy To:

EZTATTOO - AFTER-SALES DEPARTMENT

Email:sales@eztattooing.com

  @EZTATTOO OFFICIAL

www.eztattoosupply.com

Designed and Manufactured in China by EZ